



EL 3HT




Pitch:5.08(5.00) mm

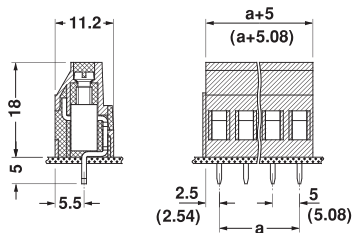


EL 3HTH




Pitch:5.08(5.00) mm



EL 3HT2L



Pitch:5.08(5.00) mm



IEC 数据	刚性导线 (mm ²)	柔性导线 (mm ²)	AWG	I (A)	U (V)
连接数据	0.2-4	0.2-2.5	24-12	28	250
绝缘材料组别	I				
污染等级	3 2 2				
过电压类别	III III II				
额定电压(V)	250 320 630				
额定冲击电压(KV)	4				
绝缘材料/阻燃等级 UL 94	PA/V0				
螺钉/扭矩(-/Nm)	M3/0.5-0.6				
剥线长度(mm)	7				
线路板孔径(mm)	Ø1.3				
引脚尺寸(mm)	0.9x0.9				

UL 数据	额定电压(V)/电流(A)	压线范围(AWG)
	300/15	30-12

IEC Technical Data	Rigid (mm ²)	flexible (mm ²)	AWG	I (A)	U (V)
Connection data	0.2-4	0.2-2.5	24-12	28	250
Insulating Material Group	I				
Pollution degree	3 2 2				
Overvoltage Category	III III II				
Rate Voltage(V)	250 320 630				
Rate impulse Voltage(KV)	4				
Insulating material/Inflammability Class	PA/V0				
Screw/Torque(-/Nm)	M3/0.5-0.6				
Stripping length(mm)	7				
PCB Hole Diameter(mm)	Ø1.3				
Pin Dimensions(mm)	0.9x0.9				

UL Technical Data	Rate Voltage(V)/Current(A)	Wire Range(AWG)
	300/15	30-12

位数/No. of positions	订货型号/Order No.
2	EL 3HT-2-5.00
3	EL 3HT-3-5.00
2	EL 3HT-2-5.08
3	EL 3HT-3-5.08

IEC 数据	刚性导线 (mm ²)	柔性导线 (mm ²)	AWG	I (A)	U (V)
连接数据	0.2-4	0.2-2.5	24-12	24	250
绝缘材料组别	I				
污染等级	3 2 2				
过电压类别	III III II				
额定电压(V)	250 320 630				
额定冲击电压(KV)	4				
绝缘材料/阻燃等级 UL 94	PA/V0				
螺钉/扭矩(-/Nm)	M3/0.5-0.6				
剥线长度(mm)	7				
线路板孔径(mm)	Ø1.3				
引脚尺寸(mm)	0.9x0.9				

UL 数据	额定电压(V)/电流(A)	压线范围(AWG)
	300/15	30-12

IEC Technical Data	Rigid (mm ²)	flexible (mm ²)	AWG	I (A)	U (V)
Connection data	0.2-4	0.2-2.5	24-12	24	250
Insulating Material Group	I				
Pollution degree	3 2 2				
Overvoltage Category	III III II				
Rate Voltage(V)	250 320 630				
Rate impulse Voltage(KV)	4				
Insulating material/Inflammability Class	PA/V0				
Screw/Torque(-/Nm)	M3/0.5-0.6				
Stripping length(mm)	7				
PCB Hole Diameter(mm)	Ø1.3				
Pin Dimensions(mm)	0.9x0.9				

UL Technical Data	Rate Voltage(V)/Current(A)	Wire Range(AWG)
	300/15	30-12

位数/No. of positions	订货型号/Order No.
2	EL 3HTH-2-5.00
3	EL 3HTH-3-5.00
2	EL 3HTH-2-5.08
3	EL 3HTH-3-5.08

Each position with 2 poles					
IEC 数据	刚性导线 (mm ²)	柔性导线 (mm ²)	AWG	I (A)	U (V)
连接数据	0.2-4	0.2-2.5	24-12	24	250
绝缘材料组别	I				
污染等级	3 2 2				
过电压类别	III III II				
额定电压(V)	250 320 630				
额定冲击电压(KV)	4				
绝缘材料/阻燃等级 UL 94	PA/V0				
螺钉/扭矩(-/Nm)	M3/0.5-0.6				
剥线长度(mm)	8				
线路板孔径(mm)	Ø1.3				
引脚尺寸(mm)	0.9x0.9				

UL 数据	额定电压(V)/电流(A)	压线范围(AWG)
	300/15	30-12

IEC Technical Data	Rigid (mm ²)	flexible (mm ²)	AWG	I (A)	U (V)
Connection data	0.2-4	0.2-2.5	24-12	24	250
Insulating Material Group	I				
Pollution degree	3 2 2				
Overvoltage Category	III III II				
Rate Voltage(V)	250 320 630				
Rate impulse Voltage(KV)	4				
Insulating material/Inflammability Class	PA/V0				
Screw/Torque(-/Nm)	M3/0.5-0.6				
Stripping length(mm)	8				
PCB Hole Diameter(mm)	Ø1.3				
Pin Dimensions(mm)	0.9x0.9				

UL Technical Data	Rate Voltage(V)/Current(A)	Wire Range(AWG)
	300/15	30-12

位数/No. of positions	订货型号/Order No.
2	EL 3HT2L-2-5.00
3	EL 3HT2L-3-5.00
2	EL 3HT2L-2-5.08
3	EL 3HT2L-3-5.08