


BL 2.5VR




Pitch:5.08(5.00) mm



BL 2.5VRF



Pitch:5.08(5.00) mm

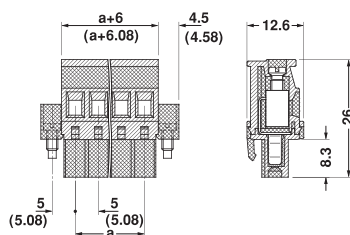

IEC 数据	刚性导线 (mm ²)	柔性导线 (mm ²)	AWG	I (A)	U (V)
连接数据	0.2–2.5	0.2–2.5	24–12	12	250
绝缘材料组别	I				
污染等级	3 2 2				
过电压类别	III III II				
额定电压(V)	250 320 630				
额定冲击电压(KV)	4				
绝缘材料/阻燃等级 UL 94	PA/V0				
螺钉/扭矩(-/Nm)	M3/0.5–0.6				
剥线长度(mm)	7				
线路板孔径(mm)	\				
引脚尺寸(mm)	\				

UL 数据	额定电压(V)/电流(A)	压线范围(AWG)
	300/15	30–12

IEC Technical Data	Rigid (mm ²)	flexible (mm ²)	AWG	I (A)	U (V)
Connection data	0.2–2.5	0.2–2.5	24–12	12	250
Insulating Material Group	I				
Pollution degree	3 2 2				
Overvoltage Category	III III II				
Rate Voltage(V)	260 320 630				
Rate impulse Voltage(KV)	4				
Insulating material/Inflammability Class	PA/V0				
Screw/Torque(-/Nm)	M3/0.5–0.6				
Stripping length(mm)	7				
PCB Hole Diameter(mm)	\				
Pin Dimensions(mm)	\				

UL Technical Data	Rate Voltage(V)/Current(A)	Wire Range(AWG)
	300/15	30–12

位数/No. of positions	订货型号/Order No.
2	BL 2.5VR–2–5.00
...	...
24	BL 2.5VR–24–5.00
2	BL 2.5VR–2–5.08
...	...
24	BL 2.5VR–24–5.08

IEC 数据	刚性导线 (mm ²)	柔性导线 (mm ²)	AWG	I (A)	U (V)
连接数据	0.2–2.5	0.2–2.5	24–12	12	250
绝缘材料组别	I				
污染等级	3 2 2				
过电压类别	III III II				
额定电压(V)	250 320 630				
额定冲击电压(KV)	4				
绝缘材料/阻燃等级 UL 94	PA/V0				
螺钉/扭矩(-/Nm)	M3/0.5–0.6				
剥线长度(mm)	7				
线路板孔径(mm)	\				
引脚尺寸(mm)	\				

UL 数据	额定电压(V)/电流(A)	压线范围(AWG)
	300/15	30–12

IEC Technical Data	Rigid (mm ²)	flexible (mm ²)	AWG	I (A)	U (V)
Connection data	0.2–2.5	0.2–2.5	24–12	12	250
Insulating Material Group	I				
Pollution degree	3 2 2				
Overvoltage Category	III III II				
Rate Voltage(V)	260 320 630				
Rate impulse Voltage(KV)	4				
Insulating material/Inflammability Class	PA/V0				
Screw/Torque(-/Nm)	M3/0.5–0.6				
Stripping length(mm)	7				
PCB Hole Diameter(mm)	\				
Pin Dimensions(mm)	\				

UL Technical Data	Rate Voltage(V)/Current(A)	Wire Range(AWG)
	300/15	30–12

位数/No. of positions	订货型号/Order No.
2	BL 2.5VRF–2–5.00
...	...
24	BL 2.5VRF–24–5.00
2	BL 2.5VRF–2–5.08
...	...
24	BL 2.5VRF–24–5.08