




S 2.5H




Pitch:5.08(5.00) mm

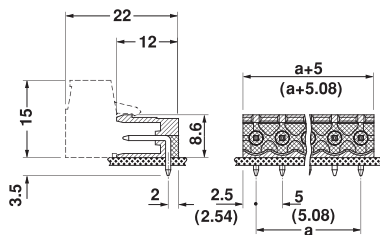


S 2.5HG




Pitch:5.08(5.00) mm

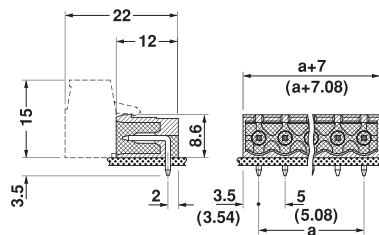

S 2.5HF



Pitch:5.08(5.00) mm

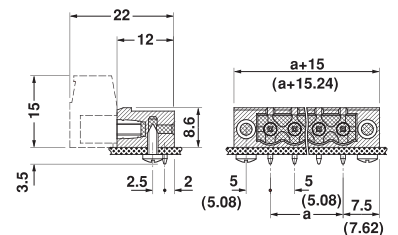

IEC 数据	刚性导线 (mm ²)	柔性导线 (mm ²)	AWG	I (A)	U (V)
连接数据	\	\	\	12	250
绝缘材料组别				III a	
污染等级				3	2
过电压类别				III	II
额定电压(V)				250	320
额定冲击电压(KV)				4	
绝缘材料/阻燃等级 UL 94				PBT/V0	
螺钉/扭矩(-Nm)				\	
剥线长度(mm)				\	
线路板孔径(mm)				∅1.4	
引脚尺寸(mm)				1x1	

UL 数据	额定电压(V)/电流(A)	压线范围(AWG)
额定电压(V)/电流(A)	300/15	
压线范围(AWG)	\	

IEC Technical Data	Rigid (mm ²)	flexible (mm ²)	AWG	I (A)	U (V)
Connection data	\	\	\	12	250
Insulating Material Group				III a	
Pollution degree				3	2
Overvoltage Category				III	II
Rate Voltage(V)				250	320
Rate impulse Voltage(KV)				4	
Insulating material/Inflammability Class				PBT/V0	
Screw/Torque(-Nm)				\	
Stripping length(mm)				\	
PCB Hole Diameter(mm)				∅1.4	
Pin Dimensions(mm)				1x1	

UL Technical Data	Rate Voltage(V)/Current(A)	Wire Range(AWG)
Rate Voltage(V)/Current(A)	300/15	
Wire Range(AWG)	\	

位数/No. of positions	订货型号/Order No.
2	S 2.5H-2-5.00
...	...
24	S 2.5H-24-5.00
2	S 2.5H-2-5.08
...	...
24	S 2.5H-24-5.08

IEC 数据	刚性导线 (mm ²)	柔性导线 (mm ²)	AWG	I (A)	U (V)
连接数据	\	\	\	12	250
绝缘材料组别				III a	
污染等级				3	2
过电压类别				III	II
额定电压(V)				250	320
额定冲击电压(KV)				4	
绝缘材料/阻燃等级 UL 94				PBT/V0	
螺钉/扭矩(-Nm)				\	
剥线长度(mm)				\	
线路板孔径(mm)				∅1.4	
引脚尺寸(mm)				1x1	

UL 数据	额定电压(V)/电流(A)	压线范围(AWG)
额定电压(V)/电流(A)	300/15	
压线范围(AWG)	\	

IEC Technical Data	Rigid (mm ²)	flexible (mm ²)	AWG	I (A)	U (V)
Connection data	\	\	\	12	250
Insulating Material Group				III a	
Pollution degree				3	2
Overvoltage Category				III	II
Rate Voltage(V)				250	320
Rate impulse Voltage(KV)				4	
Insulating material/Inflammability Class				PBT/V0	
Screw/Torque(-Nm)				\	
Stripping length(mm)				\	
PCB Hole Diameter(mm)				∅1.4	
Pin Dimensions(mm)				1x1	

UL Technical Data	Rate Voltage(V)/Current(A)	Wire Range(AWG)
Rate Voltage(V)/Current(A)	300/15	
Wire Range(AWG)	\	

位数/No. of positions	订货型号/Order No.
2	S 2.5HG-2-5.00
...	...
24	S 2.5HG-24-5.00
2	S 2.5HG-2-5.08
...	...
24	S 2.5HG-24-5.08

IEC 数据	刚性导线 (mm ²)	柔性导线 (mm ²)	AWG	I (A)	U (V)
连接数据	\	\	\	12	250
绝缘材料组别				III a	
污染等级				3	2
过电压类别				III	II
额定电压(V)				250	320
额定冲击电压(KV)				4	
绝缘材料/阻燃等级 UL 94				PBT/V0	
螺钉/扭矩(-Nm)				\	
剥线长度(mm)				\	
线路板孔径(mm)				∅1.4	
引脚尺寸(mm)				1x1	

UL 数据	额定电压(V)/电流(A)	压线范围(AWG)
额定电压(V)/电流(A)	300/15	
压线范围(AWG)	\	

IEC Technical Data	Rigid (mm ²)	flexible (mm ²)	AWG	I (A)	U (V)
Connection data	\	\	\	12	250
Insulating Material Group				III a	
Pollution degree				3	2
Overvoltage Category				III	II
Rate Voltage(V)				250	320
Rate impulse Voltage(KV)				4	
Insulating material/Inflammability Class				PBT/V0	
Screw/Torque(-Nm)				\	
Stripping length(mm)				\	
PCB Hole Diameter(mm)				∅1.4	
Pin Dimensions(mm)				1x1	

UL Technical Data	Rate Voltage(V)/Current(A)	Wire Range(AWG)
Rate Voltage(V)/Current(A)	300/15	
Wire Range(AWG)	\	

位数/No. of positions	订货型号/Order No.
2	S 2.5HF-2-5.00
...	...
24	S 2.5HF-24-5.00
2	S 2.5HF-2-5.08
...	...
24	S 2.5HF-24-5.08