




S 2.5V

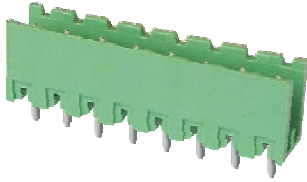


Pitch:5.08(5.00) mm

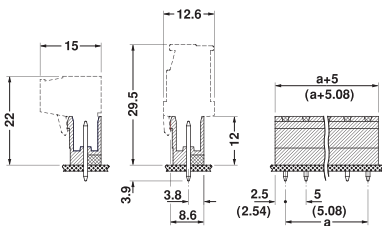

S 2.5VG

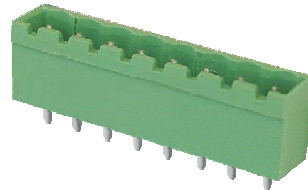


Pitch:5.08(5.00) mm

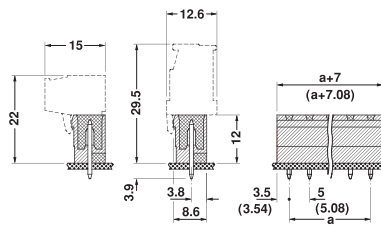

S 2.5VF



Pitch:5.08(5.00) mm

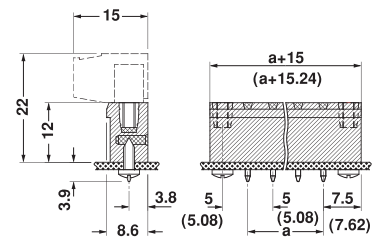

IEC 数据	刚性导线 (mm ²)	柔性导线 (mm ²)	AWG	I (A)	U (V)
连接数据	\	\	\	12	250
绝缘材料组别				III a	
污染等级			3	2	2
过电压类别			III	III	II
额定电压(V)			250	320	400
额定冲击电压(KV)				4	
绝缘材料/阻燃等级 UL 94				PBT/V0	
螺钉/扭矩(-Nm)				\	
剥线长度(mm)				\	
线路板孔径(mm)				∅1.4	
引脚尺寸 (mm)				1x1	

UL 数据	额定电压(V)/电流(A)	压线范围(AWG)
	300/15	\

IEC Technical Data	Rigid (mm ²)	flexible (mm ²)	AWG	I (A)	U (V)
Connection data	\	\	\	12	250
Insulating Material Group				III a	
Pollution degree			3	2	2
Overvoltage Category			III	III	II
Rate Voltage(V)			250	320	400
Rate impulse Voltage(KV)				4	
Insulating material/Inflammability Class				PBT/V0	
Screw/Torque(-Nm)				\	
Stripping length(mm)				\	
PCB Hole Diameter(mm)				∅1.4	
Pin Dimensions(mm)				1x1	

UL Technical Data	Rate Voltage(V)/Current(A)	Wire Range(AWG)
	300/15	\

位数/No. of positions	订货型号/Order No.
2	S 2.5V-2-5.00
...	...
24	S 2.5V-24-5.00
2	S 2.5V-2-5.08
...	...
24	S 2.5V-24-5.08

IEC 数据	刚性导线 (mm ²)	柔性导线 (mm ²)	AWG	I (A)	U (V)
连接数据	\	\	\	12	250
绝缘材料组别				III a	
污染等级			3	2	2
过电压类别			III	III	II
额定电压(V)			250	320	400
额定冲击电压(KV)				4	
绝缘材料/阻燃等级 UL 94				PBT/V0	
螺钉/扭矩(-Nm)				\	
剥线长度(mm)				\	
线路板孔径(mm)				∅1.4	
引脚尺寸 (mm)				1x1	

UL 数据	额定电压(V)/电流(A)	压线范围(AWG)
	300/15	\

IEC Technical Data	Rigid (mm ²)	flexible (mm ²)	AWG	I (A)	U (V)
Connection data	\	\	\	12	250
Insulating Material Group				III a	
Pollution degree			3	2	2
Overvoltage Category			III	III	II
Rate Voltage(V)			250	320	400
Rate impulse Voltage(KV)				4	
Insulating material/Inflammability Class				PBT/V0	
Screw/Torque(-Nm)				\	
Stripping length(mm)				\	
PCB Hole Diameter(mm)				∅1.4	
Pin Dimensions(mm)				1x1	

UL Technical Data	Rate Voltage(V)/Current(A)	Wire Range(AWG)
	300/15	\

位数/No. of positions	订货型号/Order No.
2	S 2.5VG-2-5.00
...	...
24	S 2.5VG-24-5.00
2	S 2.5VG-2-5.08
...	...
24	S 2.5VG-24-5.08

IEC 数据	刚性导线 (mm ²)	柔性导线 (mm ²)	AWG	I (A)	U (V)
连接数据	\	\	\	12	250
绝缘材料组别				III a	
污染等级			3	2	2
过电压类别			III	III	II
额定电压(V)			250	320	400
额定冲击电压(KV)				4	
绝缘材料/阻燃等级 UL 94				PBT/V0	
螺钉/扭矩(-Nm)				\	
剥线长度(mm)				\	
线路板孔径(mm)				∅1.4	
引脚尺寸 (mm)				1x1	

UL 数据	额定电压(V)/电流(A)	压线范围(AWG)
	300/15	\

IEC Technical Data	Rigid (mm ²)	flexible (mm ²)	AWG	I (A)	U (V)
Connection data	\	\	\	12	250
Insulating Material Group				III a	
Pollution degree			3	2	2
Overvoltage Category			III	III	II
Rate Voltage(V)			250	320	400
Rate impulse Voltage(KV)				4	
Insulating material/Inflammability Class				PBT/V0	
Screw/Torque(-Nm)				\	
Stripping length(mm)				\	
PCB Hole Diameter(mm)				∅1.4	
Pin Dimensions(mm)				1x1	

UL Technical Data	Rate Voltage(V)/Current(A)	Wire Range(AWG)
	300/15	\

位数/No. of positions	订货型号/Order No.
2	S 2.5VF-2-5.00
...	...
24	S 2.5VF-24-5.00
2	S 2.5VF-2-5.08
...	...
24	S 2.5VF-24-5.08